

Heated Merchandisers

HMR-104 Four-well system

A unique heated merchandising system that allows the customer to choose the number of wells, the style of glass, and the combination of full-serve and self-serve heated sections.



Configuration shown: All self-serve with curved glass profile on white 19 in. (483 mm) Profile base.

Description

The Henny Penny HMR heated merchandisers are designed to give operators the ultimate in flexibility and performance. Units can combine full-serve heated modules with self-serve heated modules in virtually any configuration. In addition, four different glass profiles are available.

All full-serve modules feature Henny Penny's unique THERMA-VEC® Even Heat Process.

Configuration

- All full-serve or all self-serve units are available in 3, 4, 5, 6, or 7 wells. (See separate Data Sheets for other sizes.)
- Full-serve and self-serve sections can be combined in modules of two or more adjacent wells to create a customized combination merchandiser of 4, 5, 6, or 7 wells.
- Four glass profiles to choose from: curved, straight, vision (matches Hussmann Vision® series), advantage (matches Tyler Advantage® series.)
- Merchandiser bases are available in Profile or Pedestal styles in several heights and colors. (See separate Data Sheet.)

Main Features

- Easy to use controls located in top rear panel for optimal operator viewing and access.
- Independent controls over each well for upper radiant heat and food probe temperature display.
- Control settings can be locked to prevent accidental changes.
- Lower heat and water pan heat independently controlled.
- Mirrored or clear side glass. (CE units are only available with clear side glass.)
- Separate switches for power and lights.
- Exclusive THERMA-VEC® Even Heat Process holds food at precise and stable temperatures.
- Humidified operation with built-in low-water indication.
- Front glass lifts easily for cleaning and closes gently on gas springs.
- Sliding rear doors with mirrored glass can be removed from high wattage units for efficient service during peak operation.
- Brilliant halogen lamps for attractive food presentation.
- Fold-down wood or plastic cutting board.
- Units are shipped with adjustable pan supports, food temperature probes, and a water pan.

Accessories available separately

Modular system of wire shelves and guide rails that offer "two-tier" capacity for various HMR configurations:

- Wire shelf—three-well section
- Wire shelf—two-well section
- Pan support with guide rail

Henny Penny Corporation
PO Box 60
Eaton OH 45320 USA


+1 937 456.8400
+1 937 456.8434 Fax

Toll free in USA
800 417.8417
800 417.8434 Fax

www.hennypenny.com

HMR-104 Specifications

Glass Profiles

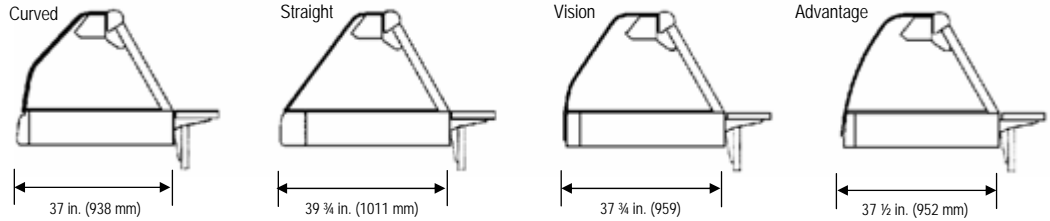


Clearances

Rear: allow 9 in. (229 mm) for cutting board
 Top: allow at least 15 in. (381 mm) for raising front glass.



Matches Hussmann Vision® Series refrigerated cases: NEBOH, NESDH, NEGDH, HEGDF

Matches Tyler Advantage® Series refrigerated cases: LCF-6, 8, 12 and LCM-6, 8, 12

Dimensions

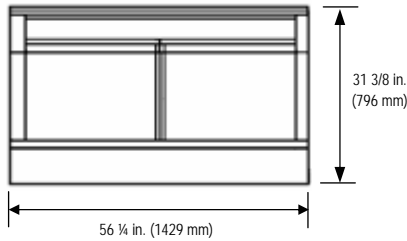

F/S Configurations



Full-Serve Pan Capacity

Each full-serve well holds one full-size pan and one third-size pan up to 4 in. (102 mm) depth.

Self-Serve Area

4-well section: 26 3/4 x 49 1/2 in. (679 x 1257 mm)
 2-well section: 26 3/4 x 24 3/4 in. (679 x 628 mm)

Please specify insert depth: Flat, 3/8 in. (10 mm), or 2 in. (51 mm)

Shipping Weight

Approximately 400 lb (182 kg). Actual shipping weight will vary depending on glass profiles and F/S configurations.



Shipping Cube Dimensions

L x W x H: 62 3/4 x 48 3/4 x 40 in. (159.4 x 123.8 x 101.6 cm)

Listings

UL, UL Sanitation, CSA, CE

Electrical

Config.	Volts	Phase	Watts	Amps	Wire	Plug type
4S	120/208	1	2765 or 3765	13.3 or 18.1	3+G	Power cord and plug included with the following units only, for Canada or USA destination: 120/208V 1Ph 120/208V 3PH 120/240V 1Ph   NEMA L14-30P NEMA L21-20P Note: all other electrical configurations must be hardwired at installation site.
	120/240	1	2765 or 3947	11.5 or 16.4	3+G	
	220-240	1	3199 or 4380	13.3 or 18.2	2+G	
	120/208	3	2765 or 3765	9.2 or 11.1	4+G	
	120/240	3	2765 or 3947	8.2 or 10.1	4+G	
	380-415	3	3199 or 4380	5.4 or 6.8	3NG	
4F	120/208	1	3341 or 4341	16.1 or 20.9	3+G	Note: all other electrical configurations must be hardwired at installation site.
	120/240	1	3377 or 4558	14.1 or 19.0	3+G	
	220-240	1	3810 or 4991	15.9 or 20.8	2+G	
	120/208	3	3341 or 4341	9.9 or 13.0	4+G	
	120/240	3	3377 or 4558	8.7 or 12.3	4+G	
	380-415	3	3810 or 4991	5.4 or 7.8	3NG	
2S/2F*	120/208	1	3253 or 4253	15.6 or 20.4	3+G	Note: all other electrical configurations must be hardwired at installation site.
	120/240	1	3289 or 4470	13.7 or 18.6	3+G	
	220-240	1	3722 or 4903	15.5 or 20.4	2+G	
	120/208	3	3253 or 4253	9.5 or 12.6	4+G	
	120/240	3	3289 or 4470	8.4 or 12.0	4+G	
	380-415	3	3722 or 4903	5.4 or 7.8	3NG	

*Well modules can be arranged in opposite order.

All units are 50/60 Hz

Specifications subject to change without notice. For up-to-date product information, please visit www.hennypenny.com.

Order from:

Manufactured by:

Henny Penny Corporation
 PO Box 60
 Eaton OH 45320 USA