Express Profit Center Merchandiser



Pictured above: The Express Profit Center EPC4 Short

With its innovative air curtain technology, the EPC4 short holds food product for up to four hours under ideal conditions.

General Information

Express Profit Center 3- and 4-foot (100 and 120 cm) merchandisers leverage innovative air curtain technology for even heating throughout the case and safe holding and merchandising in retail environments.

The air curtain directs a continuous flow of heat over the front plane of the unit in order to prevent temperatures in the ambient environment from compromising the unit's internal climate, enabling EPC units to effectively hold prepackaged, prepared food product above safe holding temperature for up to four hours under ideal holding conditions (see Standard Features).

Regardless of food product location within the case, the air curtain offers minimal product degradation from overheating.

Designed for retail use, EPC merchandisers integrate well with



chains seeking to expand crossmerchandising options and impulse sales to customers. The EPC's numerous mobility, electrical wiring and cord exit options enable the unit to be optimally positioned. EPC short merchandisers can be ordered with casters or legs.

The unit's internal operatoradjustable shelving can be removed easily for cleaning, while environmentally conscious LED lighting conserves energy and reduces maintenance costs from frequent lamp replacement.

Standard Features

- Climate secured with air curtain technology for <u>up to a 4 hour safe</u> <u>hold time</u> under the following ideal holding conditions*:
 - Ambient temperatures ranging anywhere between 70° to 74°F (21° to 23°C)
 - Merchandiser holds 3.0 to 3.5 lb. (1.36 – 1.59 kg) chickens in domes [Pactiv CNC-6007]
 - Shelf heat is set per recommendation in the Operations Manual
 - Merchandiser is operated at rated voltage
 - Chicken enters the merchandiser between 180° to 190°F (82° to 88°C)

- Air curtain minimizes food waste due to shrinkage as food product is warmed by a combination of air and heated shelving.
- Consistent holding temperatures throughout case under ideal holding conditions.
- Environmentally conscious, LED lighting for enhanced color rendering and long life.
- Enhanced merchandising and cross-merchandising capabilities.
- Lightweight, on-demand, operator-adjustable shelving for a variety of product sizes.

- Temperature of each shelf controlled independently.
- Numerous mobility, electrical wiring and cord exit options enable the unit to be optimally positioned.
- Front and side bumpers to protect from shopping carts.

Optional accessories:

 Side basket accessory to cross-merchandise dry goods
Legs or casters

* Safe holding times may vary depending on the food product.



Laboratory certifications




www.hennypenny.com

PROJECT	QUANTITY	ITEM NO

MODEL **EPC-300**, **EPC-400**

Express Profit Center Merchandiser Short

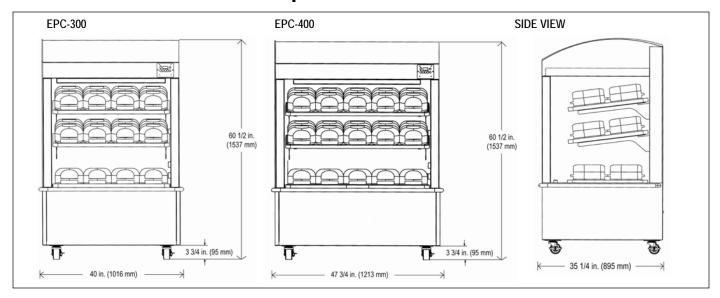

2-pole, 3-wire phase NEMA 6-20P	,1	Shelf Heat: Duty cycle (0-100%) Humidity: N/A				Clearances: 4 in. (102 mm) to rear for power cord exit Water connections: N/A							
2-pole, 3-wire for all other 1 phase			Electrical Specs				EPC-300		EPC-400				
voltages NEMA 6-30P				Cert	Volts	Phase	Cycle/H	z Wire	Watts	Amps	s Watts	Amps	
					208	1	60	2+G	3570	17.2	4584	22	
3-pole, 4-wire, 3 phase				UL/CUL	208	3	60	3+G	3570	14.8	4584	19	
NEMA 15-20F					240	1	60	2+G	3578	15.7	4600	20	
					240	3	60	3+G	3578	12.8	4600	16.5	
3-pole, 4-wire, 3 phase				CE	400	3	50-60	3NG	3575	7.4	4595	7.5	
NEMA 15-30F													
					Cap	Capacities EPC-300		E		EPC-400			
	Dimensions		Crated Dimensions		Der	shelf	31 in. x 21 1/2 in. (787 x 546 mm) or 8			38 3/4 in. x 21 1/2 in. (984 x 546 mm) or 10			
EPC-300	Length: 35 1/4 in. (8	,	Width: 43 1/2 in. (1098 mm) Height: 68 1/2 in. (1740 mm) Weight: 483 lbs. (219 kg) Length: 41 1/4 in. (1048 mm) Width: 51 in. (1295 mm)		Per	snen							
	Width: 40 in. (1016 Height: 56 1/2 in. (1					· · · · · · · · · · · · · · · · · · ·		chicken domes		chicken domes			
	· · · · · · · · · · · · · · · · · · ·				Bot	tom	31 in. x 21 1/2 in. (787 x 546 mm) or 8			38 3/4 in. x 21 1/2 in. (984 x 546 mm) or 10			
EPC-400	Length: 35 1/4 in. (8				dec	k							
	Width: 47 3/4 in. (12 Height: 56 1/2 in. (1	,						chicken domes		chicken domes			
	1 ieigiit. 30 1/2 lli. (1	,	Weight: 531 lbs. (241 kg)		Tota	al	13 3/4 sq. ft (1.29 m²)		m²)	17 1/4 sq. ft (1.61 m²)			
Heights do not include casters. Casters not available for CE units.					or 24 chic	ken don	nes	or 30 chicke	n domes				

Bidding Specifications

- Provide Henny Penny Express Profit Center 3- or 4-foot merchandiser for safe food holding time of up to 4 hours under ideal holding conditions.
- Unit shall leverage air curtain technology to maintain safe holding temperatures.
- Unit shall be available with single or three phase electrical connection.
- Unit shall have a stainless steel exterior.
- Unit shall use environmentally conscious LED lighting.
- Unit shall maintain consistent holding temperatures throughout the case under ideal holding conditions.
- Unit shall have lightweight, operatoradjustable shelving.
- Unit shall have separate temperature controls per shelf.
- Unit shall have an integral protective bumper.
- Three foot unit shall have a per shelf capacity of 8 chicken domes, and a total unit capacity of 24 chicken domes.
- Four foot unit shall have a per shelf capacity of 10 chicken domes, and a total unit capacity of 30 chicken domes.



Continuing product improvement may subject specifications to change without notice.

www.hennypenny.com